


- **Wire :** PVC UL 1803/18AWG
length : 1100±30mm
Out diameter : 4.0mm
Temperature tolerance range : -40°~105°
Braid copper wires : 170/0.08mm
- **Terminal :**
4mm with brass nickel plated
- **Rating :**
EN 61010-31:2002+AI:2008 CAT IV 1000V 10A




AL-28

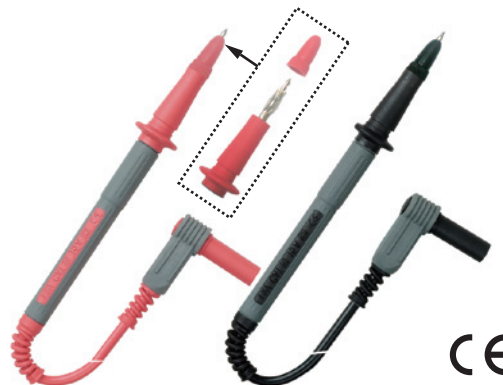

AL-28A

- 4mm banana plug
- Suitable for **AL-23C, AL-23CA, AL-25C** alligator

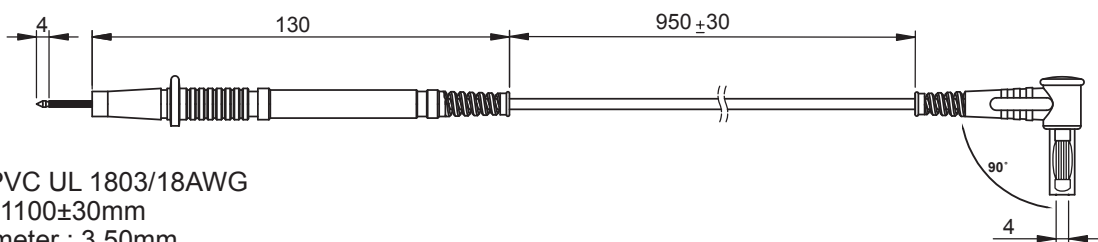

- **Wire :** PVC UL 1803/18AWG
length : 1100±30mm
Out diameter : 3.50mm
Temperature tolerance range : -40°~105°
Braid copper wires : 64/0.12mm

- **Terminal :**
Right-angle 4mm brass (Nickel plated) banana plug with caged and insulated sheathing to avoid the brass oxidation.

- **Probe tip :**
4mm (nickel plated) : AL-25
2mm (gold plated) : AL-26

- **Rating :**
EN 61010-031: 2002+AI:2008
CAT III 1000V 10A/CAT IV 600V 10A



- 4mm banana plug
- Suitable for **AL-23C, AL-23CA, AL-25C** alligator

