


AL-33

CE

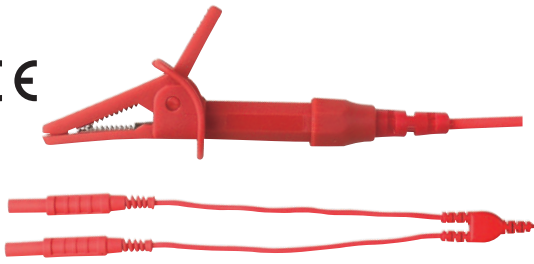

- Wide grip alligator clips with integral finger guard, large 35mm high tension spring mouth.
- PVC-insulated wire 1m with branched straight input plugs.
- Rating: EN61010-031:2002+AI:2008 CAT III 600V 10A

AL-34B

CE



- Wide grip alligator clips with integral finger guard, large 35mm high tension spring mouth.
- PVC-insulated wire 60cm (65/0.127mm).
- Right-angle connectors.
- Rating: EN61010-031:2002+AI:2008 CAT III 600V 10A

AL-34BR (Red) AL-34BB (Black)
AL-34Bbu (Blue) AL-34BW (White)
AL-34BY (Yellow)

AL-36

CE




- Wide grip alligator clips with integral finger guard, large 35mm high tension spring mouth.
- PVC-insulated wire (Red-15m, Yellow-10m, Green-5m)
- Right-angle connector.
- IEC/EN 61010-031:2002+AI:2008 CAT III 600V 2A

AL-36R (Red)
AL-36Y (Yellow)
AL-36G (Green)

TEL-AL11-7A

CE

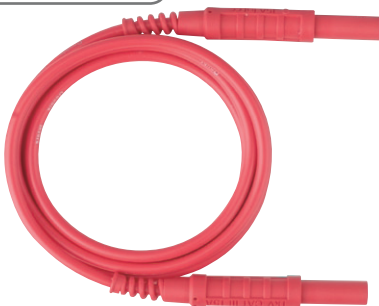

- **Terminal** : 4mm banana plug
- **Wire** : PVC UL1803
 Length : 1100±30mm
 Out diameter : 4mm
 Braid copper wires(200/0.08mm)
 Temperature tolerance range : -40° ~ 105°C
 Color : Red•Green•Black
- Rating: EN61010-031:2002+AI:2008 CAT III 600V 15A